



# BRIEF INTRODUCTION

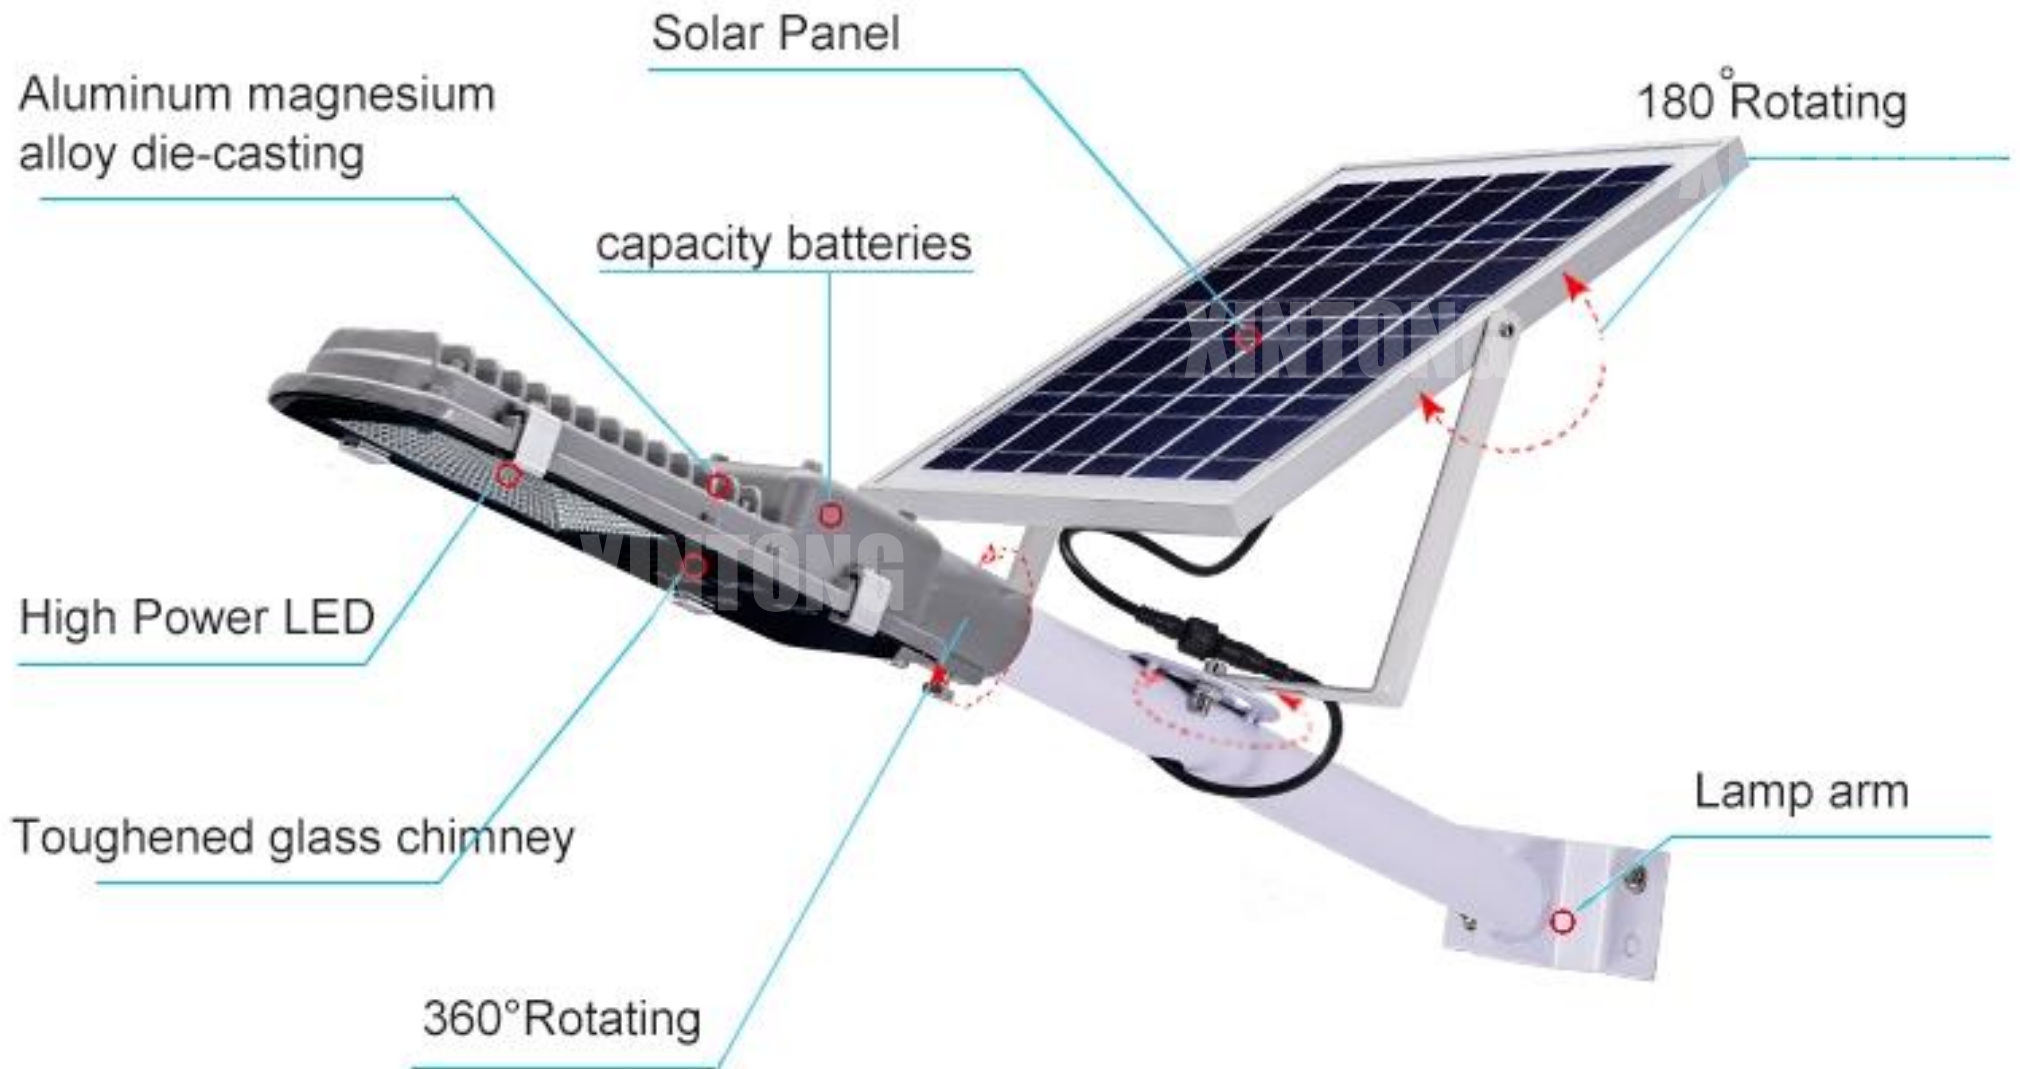

## Remote control key instructions

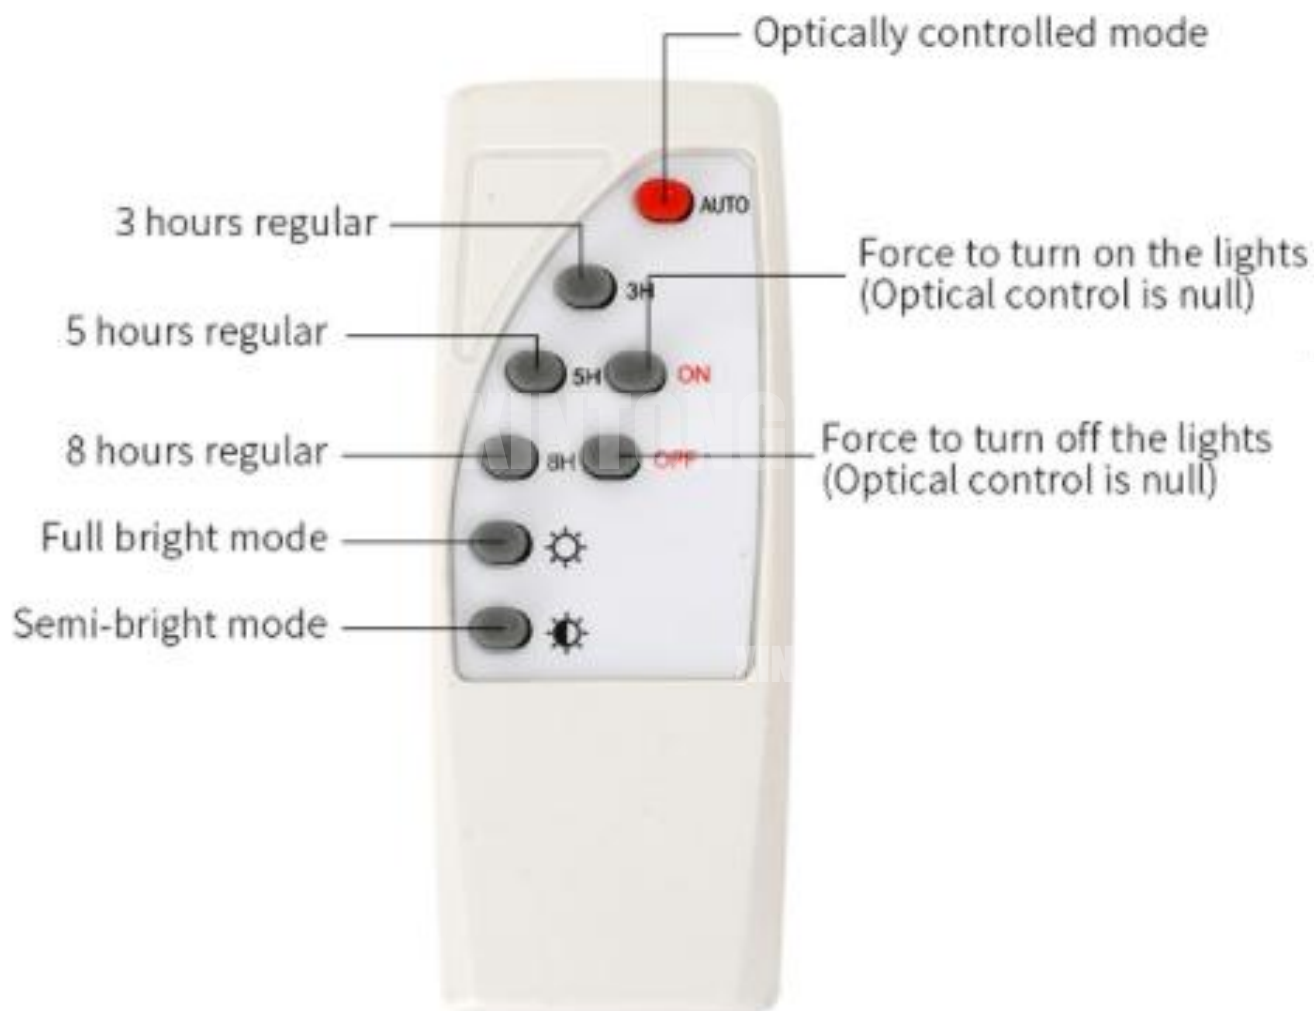

# INSTALLATION



Solar panel bracket connected to the lamp arm



180° adjustable bracket

The bracket angle can be adjusted to meet the ideal lighting angle requirement.

## Tips for Introduction



Maximum: 3"



Minimum: 1"



Less Than: 1"



## HEAT SINK

High efficiency heat dissipation  
Cooling the LED chips



## SOLAR PANEL

Whole cutting Crystalline silicon  
Photoelectric conversion efficiency is high,  
Automatic charging,  
Rainy day can also good charging,  
Long service life



## TOUGHENED GLASS

Anti atomization  
Firmly



## ADJUSTMENT ANGLE

**Three** Angle Adjustment  
180° flexible adjusting azimuth  
Wider receive sunlight ALL YRAR



**AUTO MODE**

**2 hours lighting**

**6 hours lighting**

**8 hours lighting**

## REMOTE CONTROL

Choose lighting time as you want

**100% 100% brightness**

**50% 60% brightness**

TYN  
8810

# PRODUCT SHOW





## APPLICATION

